


SCALE 1.500

DB15 Female

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE PER ECO #12-15011	04/09/12	S SHAW
B	FIXED CONNECTOR PER ECO #12-15099	05/23/12	S SHAW

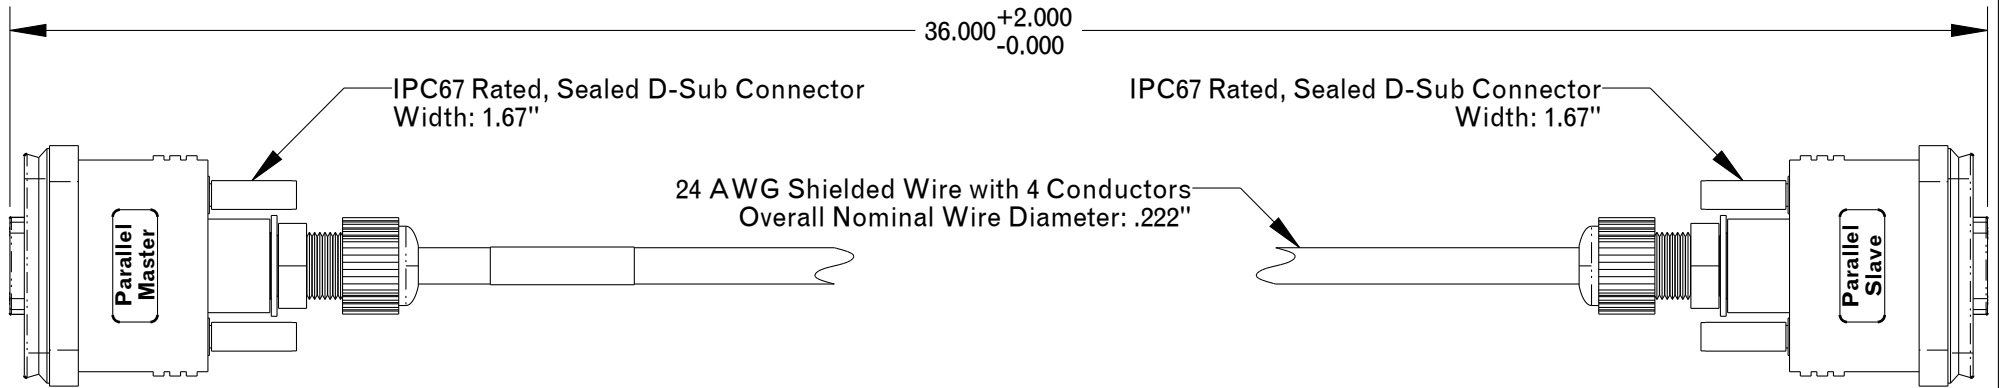

36.000^{+2.000}
-0.000

IPC67 Rated, Sealed D-Sub Connector
Width: 1.67"

IPC67 Rated, Sealed D-Sub Connector
Width: 1.67"

24 AWG Shielded Wire with 4 Conductors
Overall Nominal Wire Diameter: .222"

* Note = Double Wire Connections

Connector / Pin #	Color	Description	Connector / Pin #	Twisted Pair #
Master / 1	Black	Tx_B	Slave / 4	Pair 1
Master / 2	Red	Tx_A	Slave / 5	
Master / 3	N/A	Shield	Slave / 3	Drain Wire
Master / 4	Black	Rx_1B	Slave / 1	Pair 2
Master / 5	White	Rx_1A	Slave / 2	
Master / 7	N/A	Cable ID	Master / 10	Jumper
Slave / 6	N/A	Cable ID	Slave / 9 *	Jumper
Slave / 9 *	N/A	Cable ID	Slave / 10	Jumper

TOLERANCES:

Unless otherwise specified:
All dimensions in inches
.XX +/- .01
.XXX +/- .005
Angles +/- 1



155 Swanson Road
Boxborough, MA 01719

**UPS Communications Cable
2 Units Parallel**

SOURCE: PRO/E COMM_CABLE_2PARALLEL_15F-15F

SIZE	DATE	DWG. NO.	REV
A	09-Apr-12	SYN-9311	B

SCALE: 0.750 DRAWN: SJS CHECK: SHEET 1 of 1

Notes:

1. REFERENCE SYNQOR SPECIFICATION: 705-100061

THIS DRAWING IS THE PROPERTY OF SYNQOR, INC.
It is not to be reproduced or copied, in whole
or in part, or used for furnishing information
to others, or for any purpose detrimental to the
interests of SynQor. The information shown herein
may be protected by patents owned or controlled by SynQor.