



1

2

3


4



REVISIONS

REV	DESCRIPTION	DATE	APPROVED
A	Release to Prod Per ECO #16-21217	7/21/16	DS
B	NEW BACK SHELL PER ECO #16-21774	10/25/16	DS

120.00<sup>+4.00</sup><sub>-.00</sub>

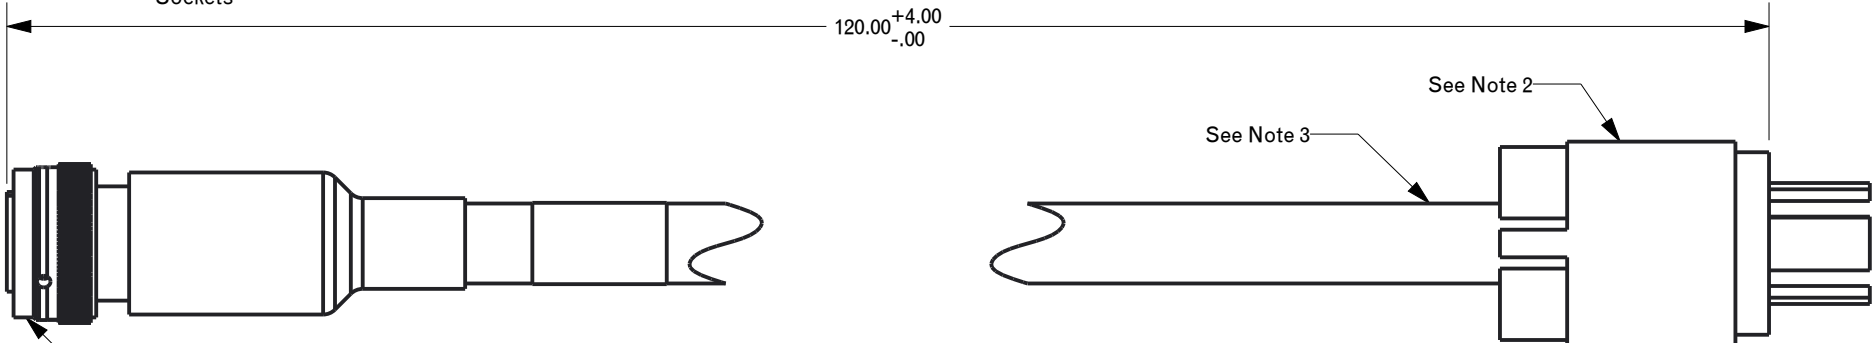

See Note 1

See Note 2

See Note 3

Pin In #	Wire Color	Description	Pin Out #
A	BLK	Line 1	X
B	WHT	Line 1	X
C	RED	Line 2	Y
D	BLU	Line 2	Y
E	WHT/BLK	Line 3	Z
F	RED/BLK	Line 3	Z
G	GRN	PE GND	G
H	ORG	PE GND	G

Notes:

1. PEI GENESIS MS3476L18-8SW
2. PASS AND SEYMOUR L1530P (NEMA L15-30P)
3. 12 AWG SOOW WIRE WITH 8 CONDUCTOR (12/8)  
WIRE INSULATION: COLOR CODED SYNTHETIC RUBBER (EPDM) OIL AND WATER RESISTANT PER UL-62  
OVERALL NOMINAL WIRE DIAMETER: .845"
4. REFERENCE SYNQOR SPECIFICATION:705-1000220
5. WEIGHT: TBA

TOLERANCES:

Unless otherwise specified:  
All dimensions in inches  
.X +/- .025  
.XX +/- .010  
.XXX +/- .005  
Angles +/- 1°

THIRD ANGLE PROJECTION



THIS DRAWING IS THE PROPERTY OF SYNQOR INC.  
It is not to be reproduced or copied, in whole or in part, or used for furnishing information to others, or for any purpose detrimental to the interests of SynQor. The information shown herein may be protected by patents owned or controlled by SynQor.



155 Swanson Road  
Boxborough, MA 01719

MPS AC Input 30A External Cable  
(NEMA L15-30P)

SOURCE: PRO/E AC\_INPUT\_NEMA515P\_CABLE

SIZE	DATE	DWG. NO.	REV
A	7/21/16	SYN-9115	B

SCALE: 0.700    DRAWN: JT    CHECK:    SHEET 1 of 1

1

2

3

4