



REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
1	Initial Release Per ECO 17-22545	6/12/17	DS
A	Release to Production Per ECO 17-23142	11/30/17	DS



SCALE 1.000

DB15 Female

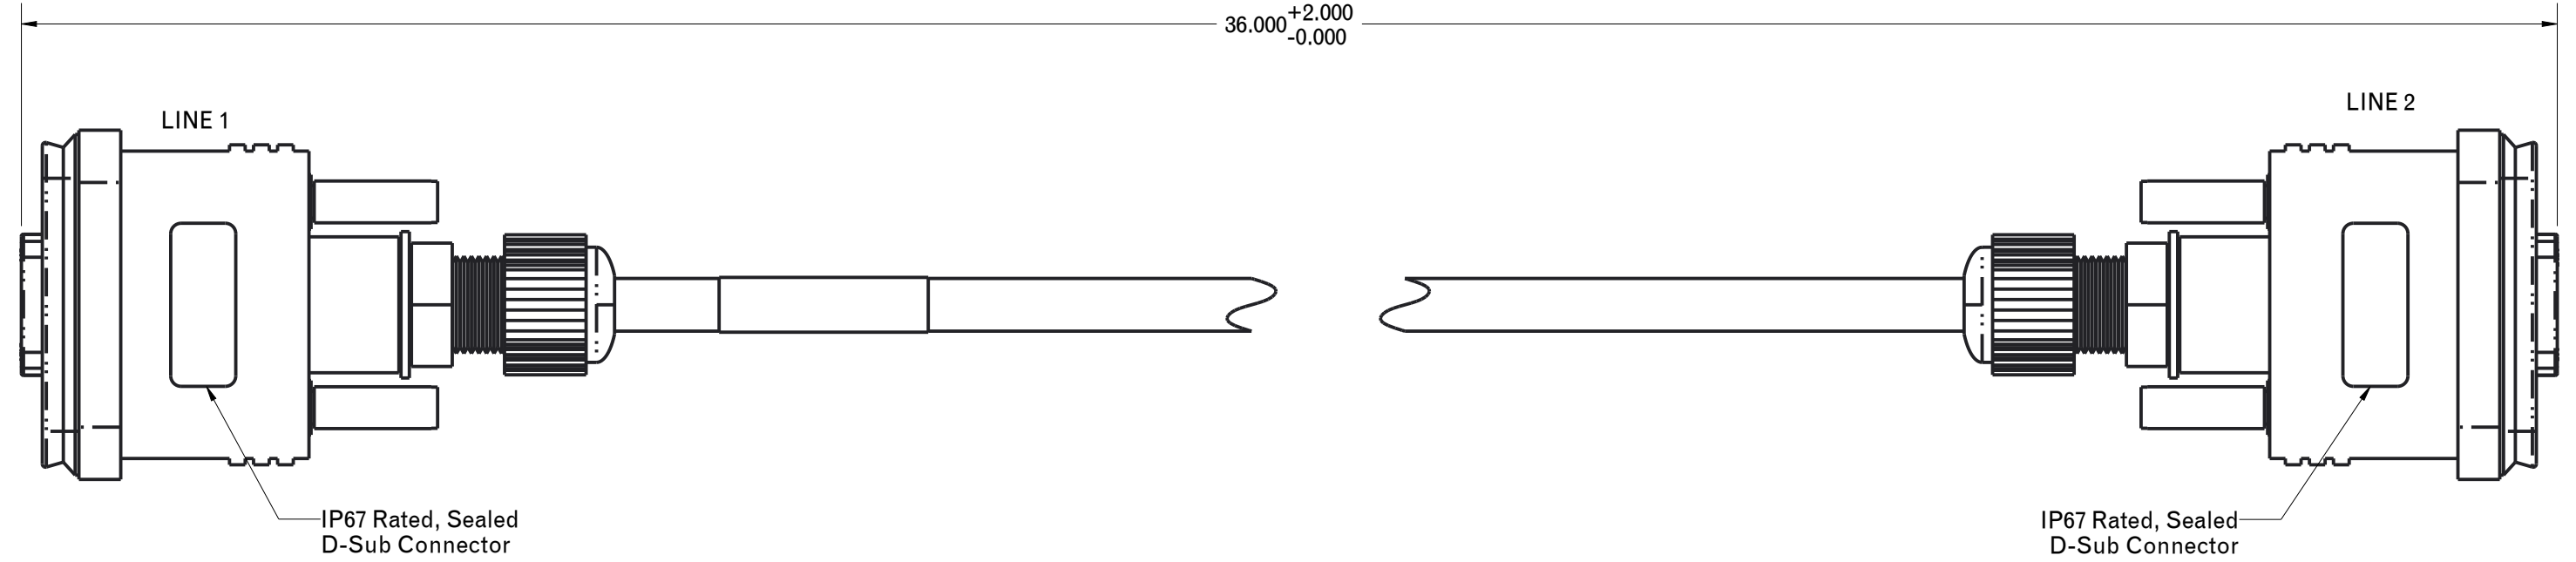

Connector / Pin #	Color	Description	Connector / Pin #	Twisted Pair #
Line1 / 1	BLACK	CH1_B	Line2 / 1	Pair 1
Line1 / 2	WHITE	CH1_A	Line2 / 2	
Line1 / 3	BLACK	GROUND	Line2 / 3	Pair 2
N/C	RED	NOT USED	N/C	
Line1 / 4	BLACK	CH2_B	Line2 / 4	Pair 3
Line1 / 5	GREEN	CH2_A	Line2 / 5	
Line1 / 14	BLACK	CAN_HI	Line2 / 14	Pair 4
Line1 / 15	BLUE	CAN_LO	Line2 / 15	
Line1 / 8	N/A	CABLE ID	Line1 / 9	JUMPER
Line1 / 9	N/A	CABLE ID	Line1 / 10	JUMPER
Line1 / 12	N/A	CABLE ID	Line1 / 10	JUMPER
Line2 / 8	N/A	CABLE ID	Line2 / 9	JUMPER
Line2 / 9	N/A	CABLE ID	Line2 / 10	JUMPER
Line2 / 12	N/A	CABLE ID	Line2 / 10	JUMPER

Notes:

- Reference SynQor specification 705-1000214.
- 24 AWG shielded wire with 8 conductors, 4 twisted pairs, CMP rated wire. Insulation: TPE 350V, -50° C to 90° C.
- Nominal wire diameter: 0.252"
- Weight: TBD

TOLERANCES: Unless otherwise specified: All dimensions in inches .X +/- .025 .XX +/- .010 .XXX +/- .005 Angles +/- 1°					155 Swanson Road Boxborough, MA 01719-1316	
	UPS 1+1 Redundancy Configuration Cable Customer Drawing				SOURCE: PRO/E SYN-9341	
THIS DRAWING IS THE PROPERTY OF SYNQOR LLC. It is not to be reproduced or copied, in whole or in part, or used for furnishing information to others, or for any purpose detrimental to the interests of SynQor. The information shown herein may be protected by patents owned or controlled by SynQor.		SIZE B	DATE 11/30/17	DWG. NO. SYN-9341	REV A	
SCALE: 1.250		DRAWN: DS	CHECK:	SHEET 1 of 1		