
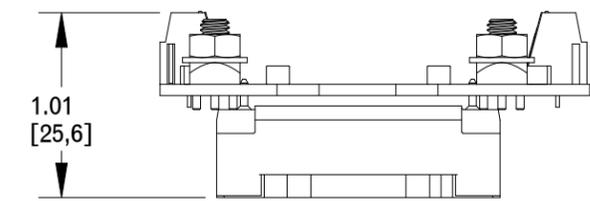
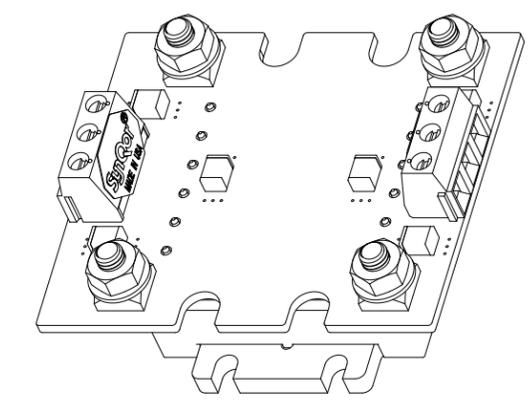
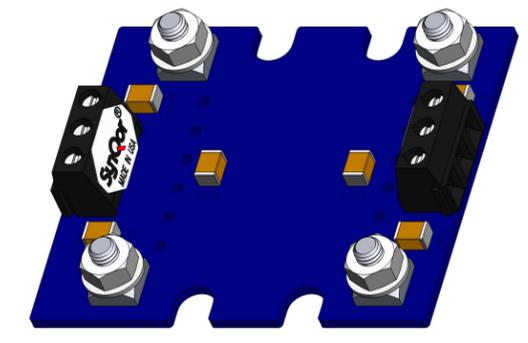


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
1	INITIAL RELEASE PER ECO 15-19511	032615	DS
A	RELEASE TO PRODUCTION 17-22331	4/10/17	DS
B	ADDED NOTE 7: "ROHS COMPLIANT" PER ECO 19-26063	12/16/19	B. KELLY

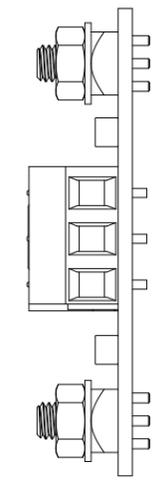

- NOTES:**
- CONSULT DATASHEET OF THE UNIT THAT THE INTERFACE BOARD IS / WILL BE MOUNTED TO FOR I/O DEFINITIONS, MOUNTING DIMENSIONS AND OPERATING PARAMETERS.
 - ALL DIMENSIONS IN INCHES (MM)
TOLERANCES:
X.XX .02 IN (X.X .5mm)
X.XXX .010 IN (X.XX .25mm)
 - Vin/Vout M4 SCREW POST, MAX TORQUE 6 IN-LB (.7Nm).
 - TERMINAL BLOCKS: WIRE SIZE 16-30 AWG, 13.5A MAX CURRENT PER TERMINAL, MAX TORQUE 4 IN-LB (.5 Nm)
 - FITS BOTH NORMAL AND FLANGED DEMI BRICKS
 - ADAPTOR WEIGHT: 0.95 oz (27 G) TYP.
 - ROHS COMPLIANT

TOLERANCES: Unless otherwise specified: All dimensions in inches .X +/- .025 .XX +/- .010 .XXX +/- .005 Angles +/- 1°					155 Swanson Road Boxborough, MA 01719-1316	
	DBI-02 FILTER INTERFACE ASSEMBLY THROUGH HOLE MOUNTING					
SOURCE: PRO/E 030-MT01698-DEMIDBI-02FILTERINT						
SIZE B	DATE 12/16/19	DWG. NO. 020-0000304	REV B			
SCALE: 1.000		DRAWN: BTK	CHECK:	SHEET 1 of 1		

THIS DRAWING IS THE PROPERTY OF SYNQOR LLC. It is not to be reproduced or copied, in whole or in part, or used for furnishing information to others, or for any purpose detrimental to the interests of SynQor. The information shown herein may be protected by patents owned or controlled by SynQor.

A

B

C

D

A

B

C

D

1

2

3

4

1

2

3

4