



SCALE 1.500

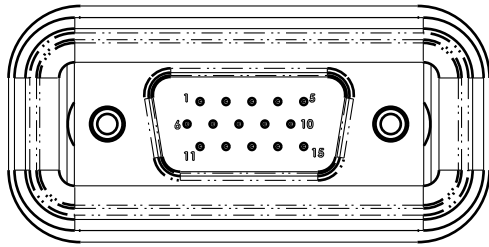

DB15 Male

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
B	FIXED TOLERANCE PER ECO #12-14565	01/20/12	S SHAW

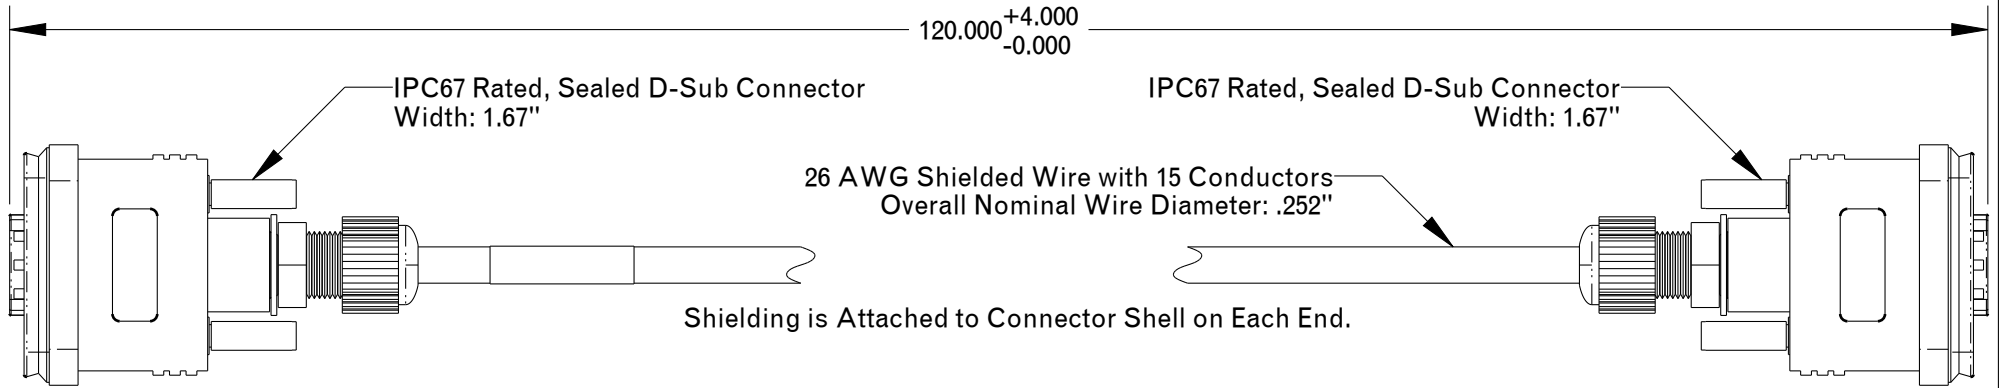

Shielding is Attached to Connector Shell on Each End.

Connect Pin 1 to Pin 1, Pin 2 to Pin 2, etc.

Pin #	Color	Description	Pin #	Color	Description
1	Black	Reserved	9	Slate	On_Bat
2	Brown	UPSTx / PCRx	10	White	Reserved
3	Red	UPSRx / PCTx	11	White / Black	Reserved
4	Orange	Sig_Gnd	12	White / Brown	Remote_Start
5	Yellow	Sig_Gnd	13	White / Red	Shutdown
6	Green	Low_Bat	14	White / Orange	Out_Ok
7	Blue	ACIn_Good	15	White / Yellow	Overtemperature
8	Violet	+5V_Out			

TOLERANCES:

Unless otherwise specified:
 All dimensions in inches
 .XX +/- .01
 .XXX +/- .005
 Angles +/- 1



155 Swanson Road
 Boxborough, MA 01719

UPS Communications Cable 15M-15M

SOURCE: PRO/E COMMUNICATIONS CABLE 15M-15M

SIZE	DATE	DWG. NO.	REV
A	20-Jan-12	SYN-9305	B

SCALE: 0.750 DRAWN: SJS CHECK: SHEET 1 of 1

Notes:

1. REFERENCE SYNQOR SPECIFICATION: 705-1000055

THIS DRAWING IS THE PROPERTY OF SYNQOR, INC.
 It is not to be reproduced or copied, in whole
 or in part, or used for furnishing information
 to others, or for any purpose detrimental to the
 interests of SynQor. The information shown herein
 may be protected by patents owned or controlled by SynQor.