


SCALE 1.250

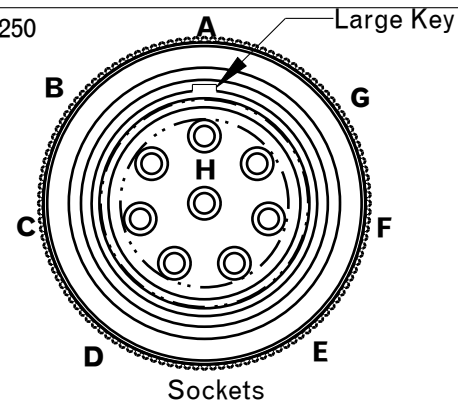

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE PER ECO #12-15099	05/24/12	S SHAW

120.00^{+4.00}
-0.00

3.000±0.125
0.375±0.125
Score and Retain
6 Places

12 AWG Wire with 6 Conductor (12/6)
Overall Nominal Wire Diameter: .745"

MIL-C-26482, Series 2 Connector
Diameter: 1.39"

Axial Ferrite Beads
Diameter: 1.65"

Pin In #	Wire Color	Label Description
A	No Connection	No Connection
B	Black	-V In
C	Blue	-V In
D	Orange	-V In
E	Green	+V In
F	Red	+V In
G	White	+V In
H	No Connection	No Connection

TOLERANCES:

Unless otherwise specified:
All dimensions in inches
.XX +/- .01
.XXX +/- .005
Angles +/- 1

SynQor 155 Swanson Road
Boxborough, MA 01719-1316

**UPS DC Input External
Cable (Hardwire)**

SOURCE: PRO/E DC INPUT HARDWARE EXTERNAL CABL

Notes:

1. REFERENCE SYNQOR SPECIFICATION: 705-100066

THIS DRAWING IS THE PROPERTY OF SYNQOR LLC. It is not to be reproduced or copied, in whole or in part, or used for furnishing information to others, or for any purpose detrimental to the interests of SynQor. The information shown herein may be protected by patents owned or controlled by SynQor.

SIZE	DATE	DWG. NO.	REV
B	24-May-12	SYN-9152	A
SCALE:	0.850	DRAWN: SJS	CHECK:
		SHEET 1 of 1	